

70V 2x2 Commercial Ceiling Speaker

Model No: WL-SPKR-22-20W-70V


Description

The 70V 2x2 Commercial Ceiling Speaker works with the Commercial Audio Power Amplifier and Wahsega Zone Controller to enable large area coverage of broadcast audio.

With its ceiling tile construction, installation is as simple as replacing an existing ceiling tile and securing the earthquake tabs. Once installed, the 2x2 Ceiling IP Speaker is a powerful device designed to reach everyone.

Key Features

- Simple drop-in ceiling grid installation
- Connects to the Commercial Audio Power Amplifier
- Simple 1W or 20W Connection

Job Name:	Date:	Location:
Notes:		

70V 2x2 Commercial Ceiling Speaker

Model No: WL-SPKR-22-20W-70V

Specification Submittal

Specifications


- Standard 70V Analog Audio
- Power Input: 1W and 20W transformer taps
- Speaker Sensitivity: 96dB 1W/0.5M SPL
- Coverage Angle: 120° / 4 kHz
- Temperature Range: -40°C to +60°C
- FCC Class A
- Weight: 9.5 lb
- Dimensions: 24" x 24" x 4.15"
- Construction: 24-gauge steel housing with white polyester powder coat paint
- Warranty: 3 years limited

Installation

Standard 2x2 lay-in mounting with earthquake tabs for added stability.

Compatibility

Connect to 100 Watt Commercial Audio Power Amplifier (70V)
(WL-ROEM-AMP-70V-100W)


Job Name:	Date:	Location:
Notes:		


70V 2x2 Commercial Ceiling Speaker

Model No: WL-SPKR-22-20W-70V

Specification Submittal

Dimensions

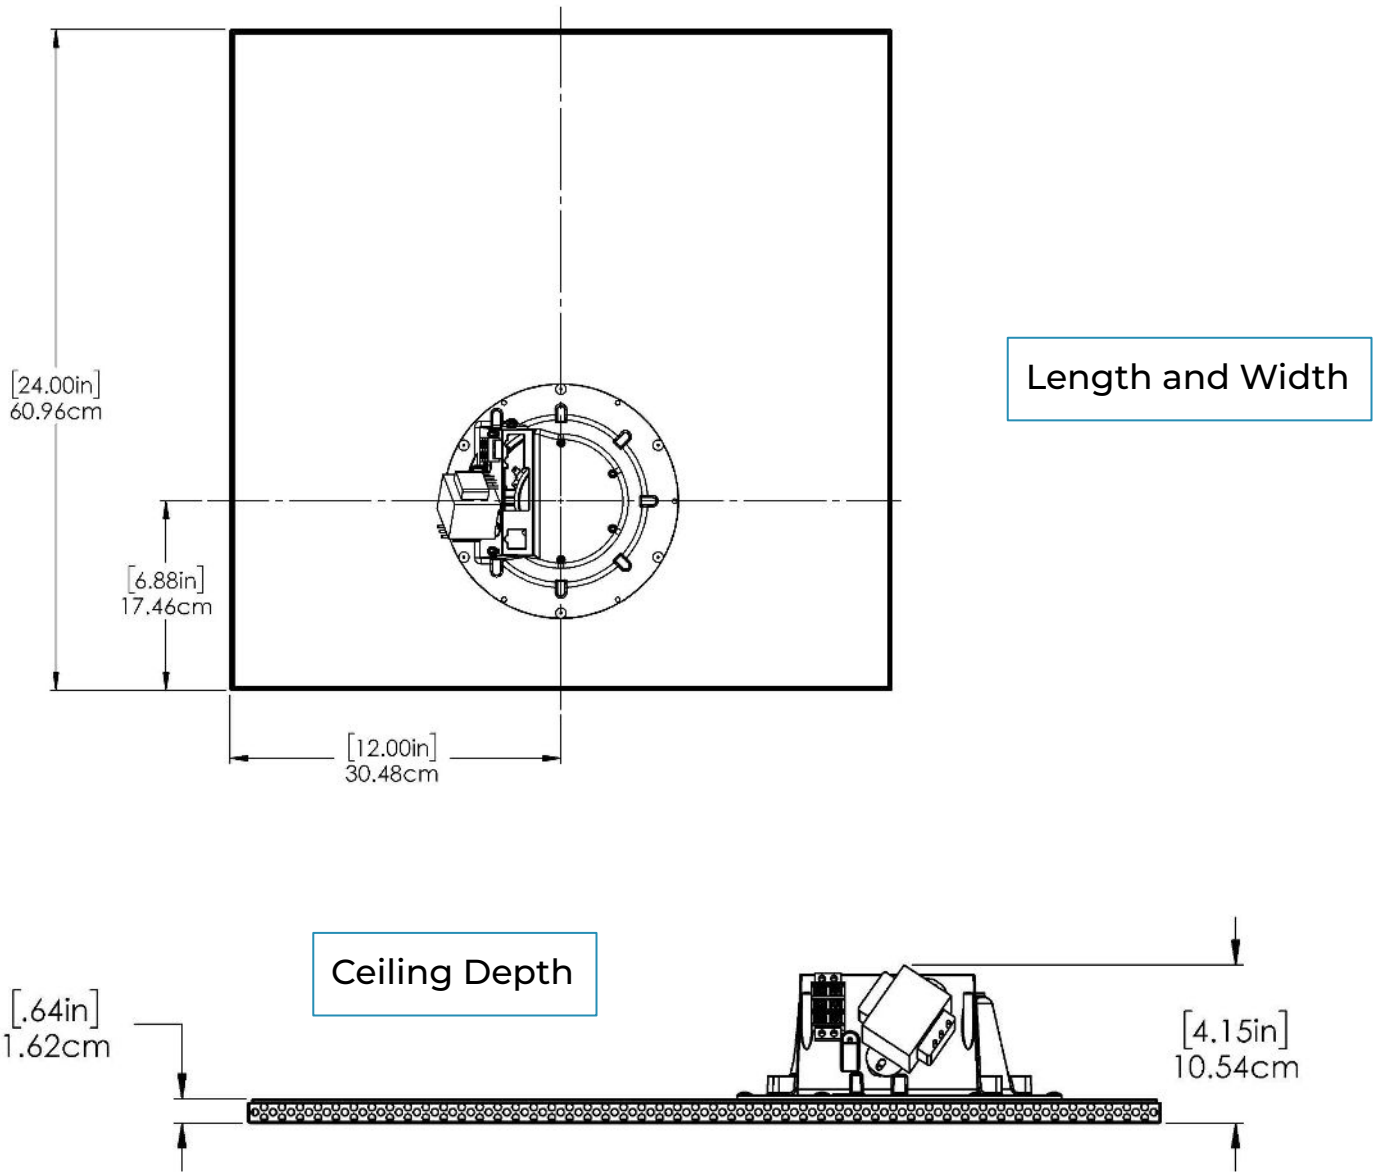


Job Name:	Date:	Location:
Notes:		

70V 2x2 Commercial Ceiling Speaker

Model No: WL-SPKR-22-20W-70V

Specification Submittal

Installer View

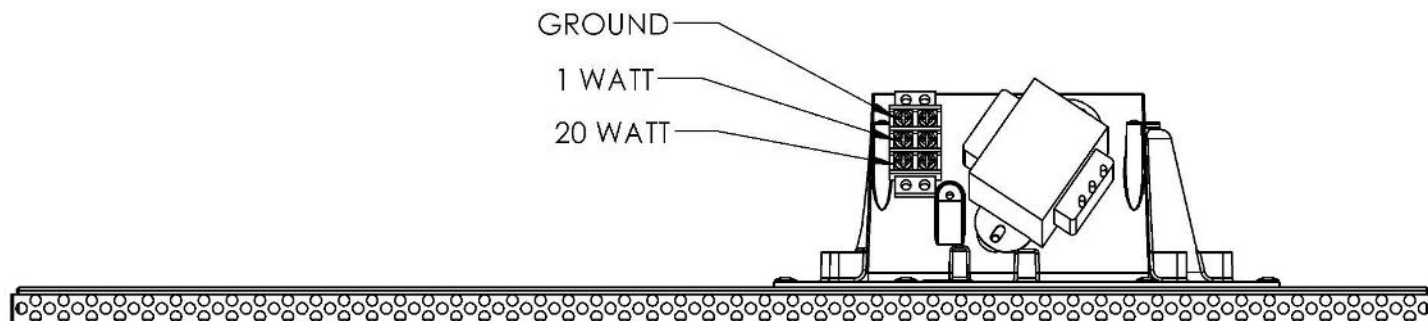

Job Name:	Date:	Location:
Notes:		