

Two-Channel IP Paging Zone Controller with InformaCast®



Description

The Wahsega IP Paging Zone Controller with InformaCast® utilizes the power of the InformaCast Notification System for multiple notification scenarios, from bell schedules to emergency lockdowns. Right out of the box, the InformaCast server will recognize and register the Wahsega Zone Controller, so it will instantly be able to receive pages in high or low-quality audio, both live and pre-recorded.

The IP Paging Zone Controller with InformaCast is available in a single-channel or a two-channel version. The two-channel Zone Controller will register as two separate endpoints in the InformaCast system, with just one PoE homerun.

The Wahsega IP Paging Zone Controller with InformaCast is perfect for schools or any other large, multi-building campuses.

Features

- Receive live or pre-recorded audio from InformaCast Advanced or InformaCast Fusion server
- Two separate InformaCast endpoints in one device
- Fully configurable via simple webpages
- Easy installation
- Remote firmware upgradeable
- Software/configuration reset button
- 10/100 Ethernet port with Power-over-Ethernet (802.3af PoE)
- +9V to +16V DC input (if not using PoE)
- High-quality (44.1 kHz) and low-quality (8kHz) audio
- Standard 1U rack mounting

Job Name: **Model Numbers:** **Date:**

Location: **Notes:**

Specifications

- Ethernet: 10/100 Mbps
- Power Input: PoE 802.3af (or +9V to +16V DC input)
- Current Draw: <2W
- Impedance: 600Ω
- Max Cable Length: 100m (per standard)
- Temperature Range: -40°C to +60°C
- Output Trim Range (Web configurable): +4dBu to -10dBV nominal
- Construction: Aluminum extrusion
- Regulatory Compliance: FCC Class A
- Dimensions: 1.66" H x 4.75" W x 5.30" D
- Warranty: 2 years limited

Model Numbers

Wahsega Labs	Zone	Controller	Channels	Options	
WL	ZN	CTR	2CH	INF	
Wahsega Labs	Zone	Controller	1-CH = Single Channel 2-CH = 2-Channel	with InformaCast	with Relay (1CH only)

WL-ZN-CTR-2CH-INF


Wahsega
Zone Controller
Two Channels
with InformaCast

Job Name: Model Numbers: Date:


Location: Notes:

Dimensions


Front

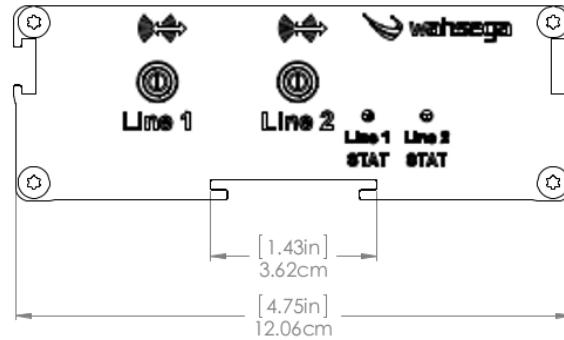

Side

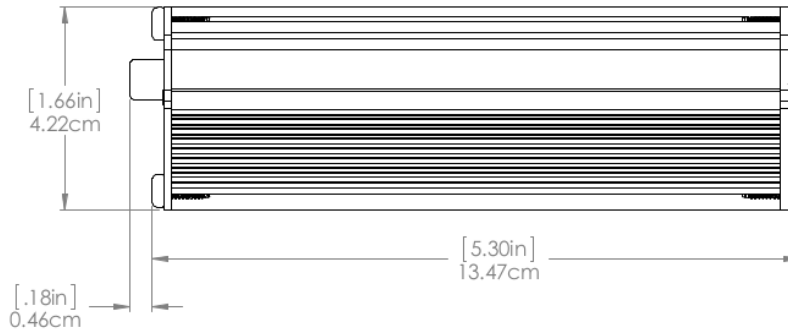

Rear

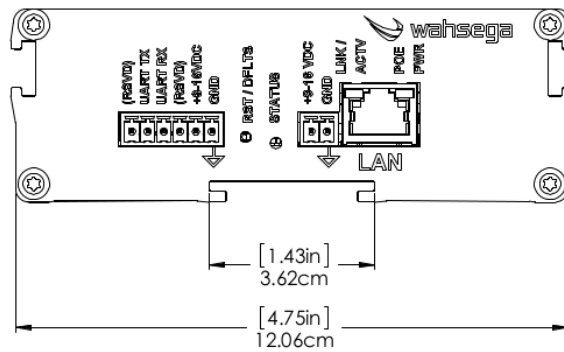

Job Name: Model Numbers: Date:

Location: Notes: