

## Carina IP Panic Button



### Description

Wahsega's Carina IP Panic Button is designed and manufactured in the USA. With its low profile, the Carina IP Panic button can be discretely placed under a desk or other secure location. Users can place an emergency SIP call to a preconfigured phone number, and the answering party can listen in to assess the situation. Perfect for use in schools and universities, banks, medical facilities and multi-tenant office buildings, the Carina IP Panic Button has an integrated microphone for high quality SIP audio and an on-board relay which can trigger security devices such as a camera or a door lock. Advanced button press technology allows the unit to call one number with a short button press and another number with a long button press. Setup is quick and easy with the centralized Carina Event Manager, which automatically detects each unit on startup. Each unit is powered via Power-over-Ethernet (PoE), using just one cable for both communication and power.

### Features:

- SIP compliant
- Peer-to-peer SIP capable
- PoE 802.3af enabled (Power-over-Ethernet)
- Environmental noise suppression
- On-board relay
- Advanced button press functionality
- Fully configurable via Wahsega Carina Event Manager
- Web-based volume control
- LED indicator light

**Job Name:**  **Model Numbers:**  **Date:**

**Location:**  **Notes:**

## Specifications

- Ethernet: 10/100 Mbps (Can force 10Mbps full-duplex)
- Protocol: SIP RFC 3261 compatible
- Temperature Range: -40°C to +60°C
- Audio Codecs: G.711 uLaw, G.711 aLaw, G.722 HD, G.726 fixed payload, G.729, DVI4 HD, DVI4 Narrowband, OPUS
- Audio Sampling: Up to 48KHz
- Form C (SPDT) Relay Contact Closure Rating: 30VDC or 270VAC, 3A
- Dimensions: 4.87" x 4.35" x 1.18" (H x W x D)
- Warranty: 2 years limited
- Regulatory Compliance: FCC Class B
- Power Input: PoE 802.3af

## Model Numbers

Wahsega Labs	Panic Button	Mic	Protocol	Color	Relay
<b>WL</b>	<b>PB</b>	<b>M</b>	<b>CAR</b>	<b>W</b>	<b>R</b>
Wahsega Labs	PB = Panic Button	M = Microphone	Carina	W = White	R = with Relay


### ***WL-PBM-CAR-W-R***

Wahsega Labs  
Panic Button  
with Microphone  
Carina  
White  
with Relay

**Job Name:**  **Model Numbers:**  **Date:**

**Location:**  **Notes:**


### Dimensions

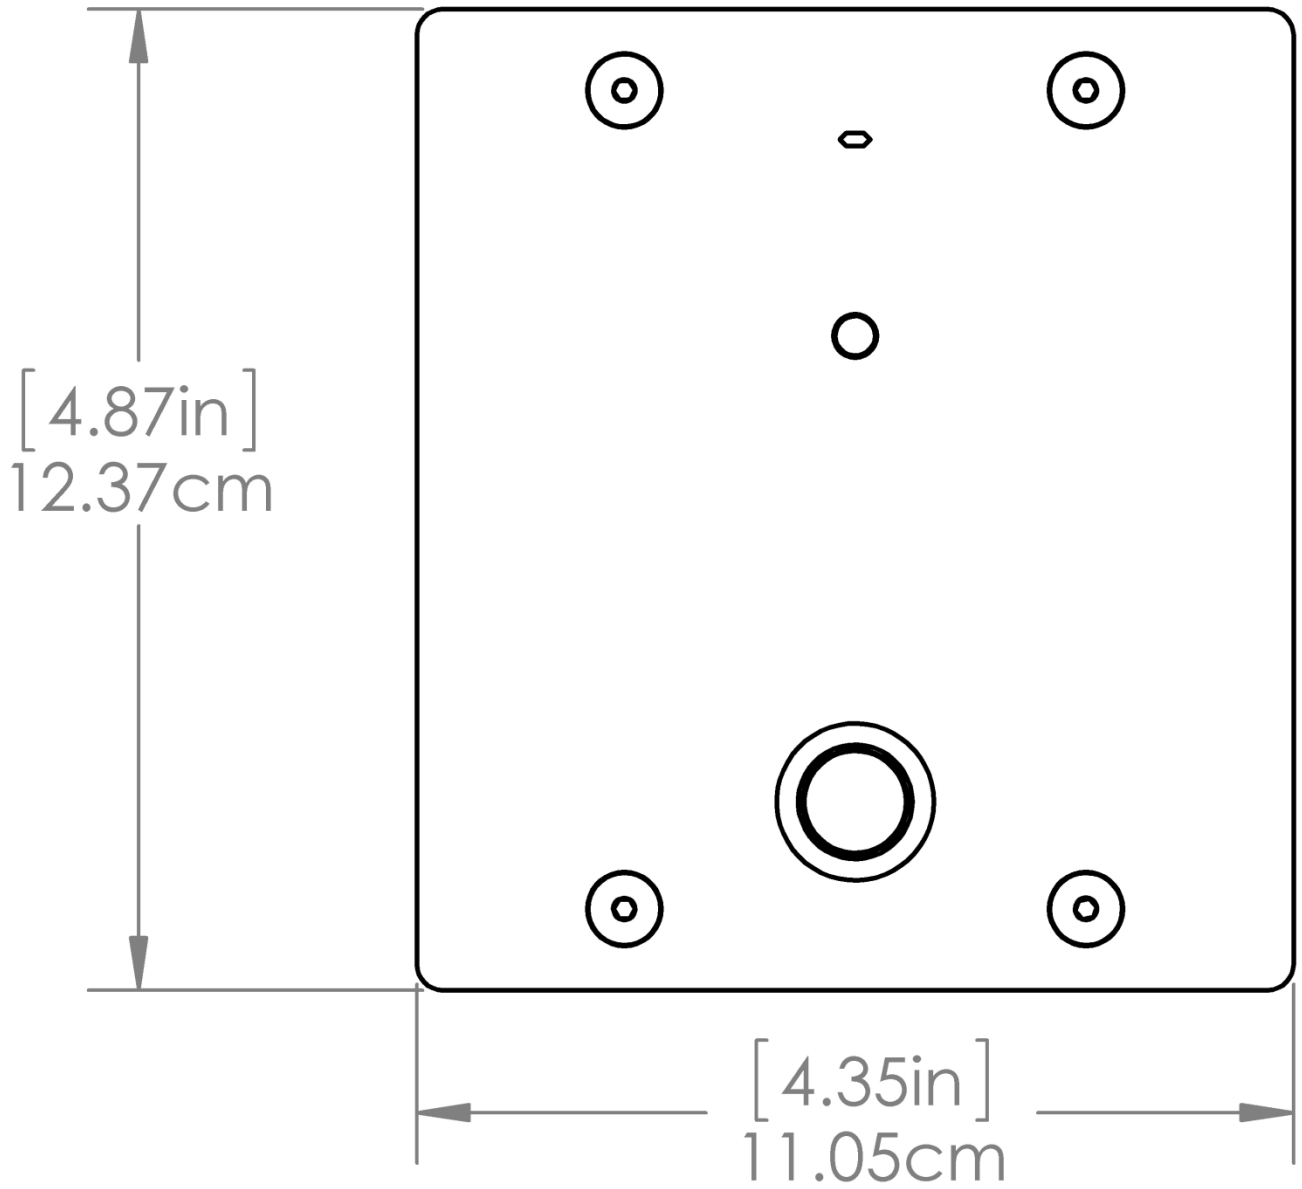

WL-PBM-CAR-W-R  
Front view

Job Name:  Model Numbers:  Date:


Location:  Notes:

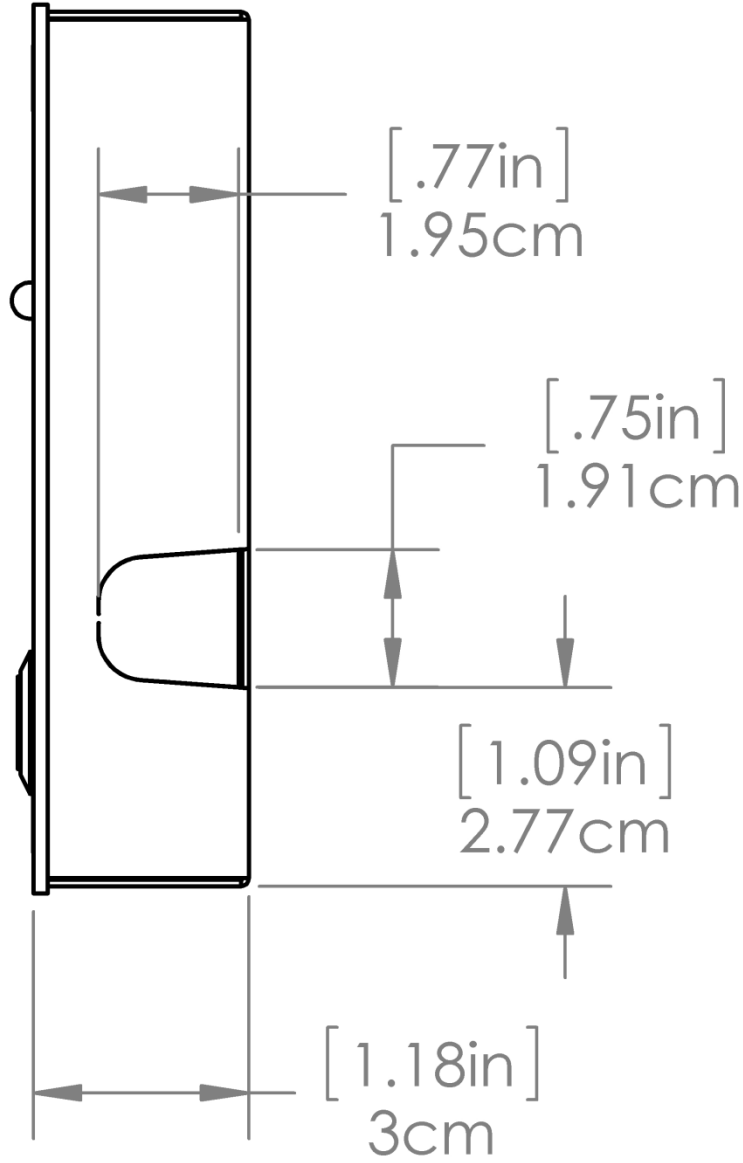

WL-PBM-CAR-W-R  
Side view

Job Name:  Model Numbers:  Date:

Location:  Notes:

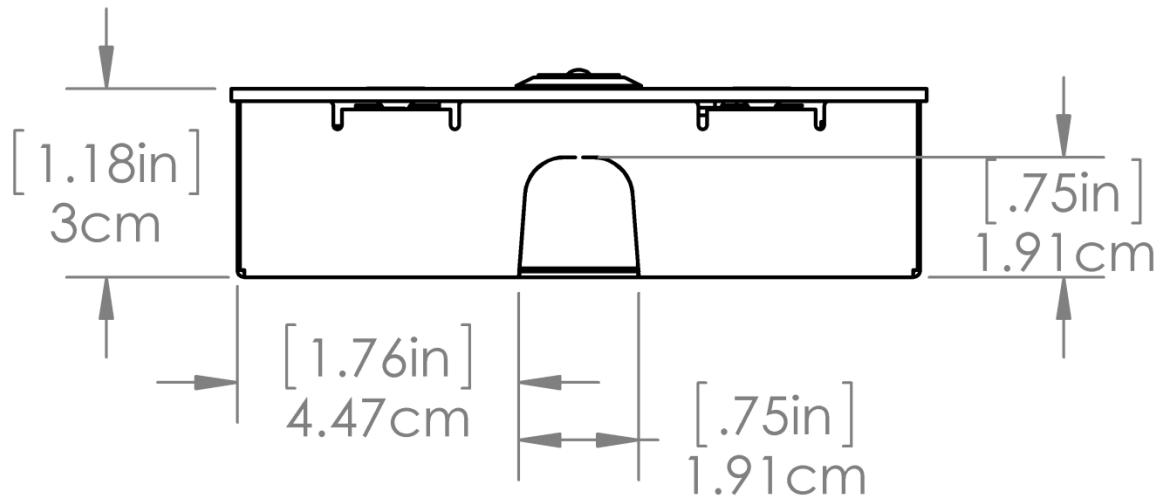


WL-PBM-CAR-W-R  
Top view

Job Name:  Model Numbers:  Date:

Location:  Notes:

## Class 2 (PELV) Terminal Connections

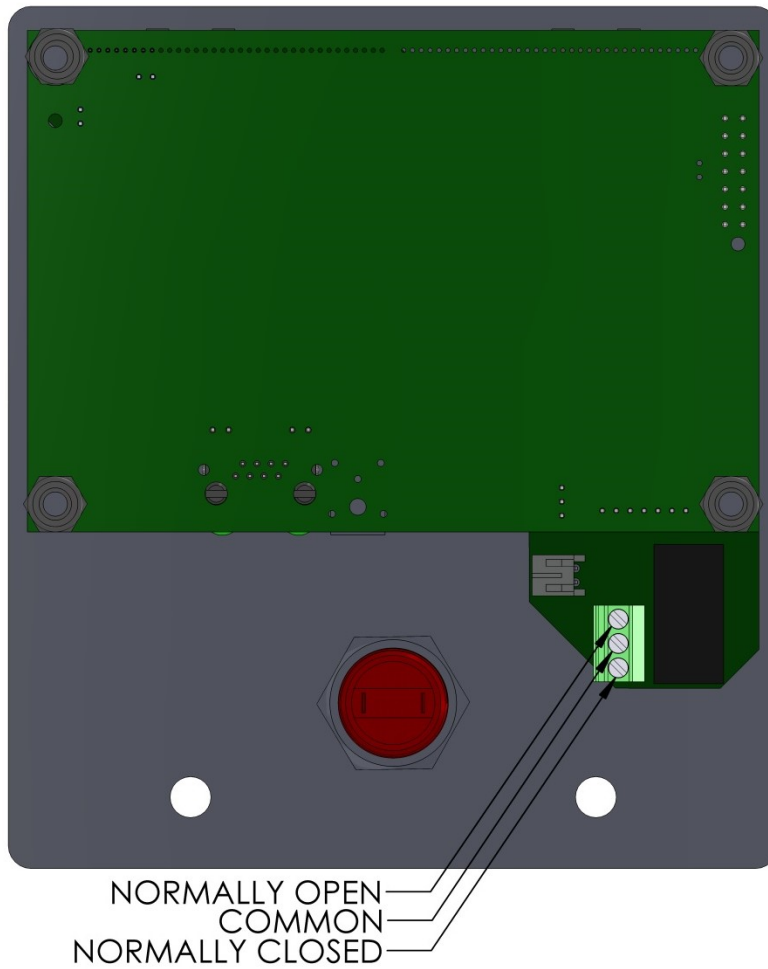

Job Name:  Model Numbers:  Date:

Location:  Notes: