

Panic/Call Button Wall Plate



Description

The Wahsega Labs Panic/Call Button Wall Plate is an accessory device designed for use with Wahsega speakers to initiate two-way SIP calls. Designed and manufactured in the USA, the Panic/Call Button Wall Plate mounts in a single-gang electrical box and is wired to the speaker via low voltage cables, secured to screw terminal connectors on the rear of the button assembly. Simply press and release the button to activate a SIP phone call at the speaker.

Features

- Push button
- Simple wall-mount installation
- Standard single-gang wallplate size
- Commercial-grade steel construction

Job Name: **Model Numbers:** **Date:**

Location: **Notes:**

Specifications

- Dimensions: 4.63" x 2.88" x 0.78" (H x W x D)
- Faceplate Materials: 14 gauge steel with powdercoat glossy white finish
- Temperature Range: -40°C to +60°C
- Warranty: 2 years limited

Model Number

WL-SPKR-RB-W

Wahsega Labs	Speaker	Function	Color
WL	SPKR	RB	W
Wahsega Labs	SPKR = Speaker	RB = Remote Button	W = White

Connections

Connects to the Wahsega speaker or Zone Controller via 2-wire low voltage cable attached at screw terminals on rear of plate. Maximum distance from speaker is 20 meters. Not compatible with Wahsega Extension Speaker (-A) models.

Installation

Standard single-gang electrical box, not provided.

Compatibility

WL-SPKR-ALT-SIP
WL-SPKR-22-CAR
WL-SPKR-22-INF
WL-SPKR-22-CAR-2CH
WL-SPKR-22-INF-2CH
WL-SPKR-22-2R
WL-SPKR-SMT-CAR
WL-SPKR-SMT-INF


WL-SPKR-SMT-CAR-2CH
WL-SPKR-SMT-INF-2CH
WL-SPKR-SMT-2R
WL-IPD-SPKR-510-CAR
WL-IPD-SPKR-510-INF
WL-IPD-SPKR-520-CAR
WL-IPD-SPKR-520-INF
WL-IPD-SPKR-510D-CAR

WL-IPD-SPKR-510D-INF
WL-IPD-SPKR-510D-CAR-TM
WL-IPD-SPKR-510D-INF-TM
WL-IPD-SPKR-540-CAR
WL-IPD-SPKR-540-INF
WL-ZN-CTR-1CH-CAR-R
WL-ZN-CTR-1CH-INF-R
WL-ZN-CTR-2CH-INF

Job Name: Model Numbers: Date:

Location: Notes:

Dimensions

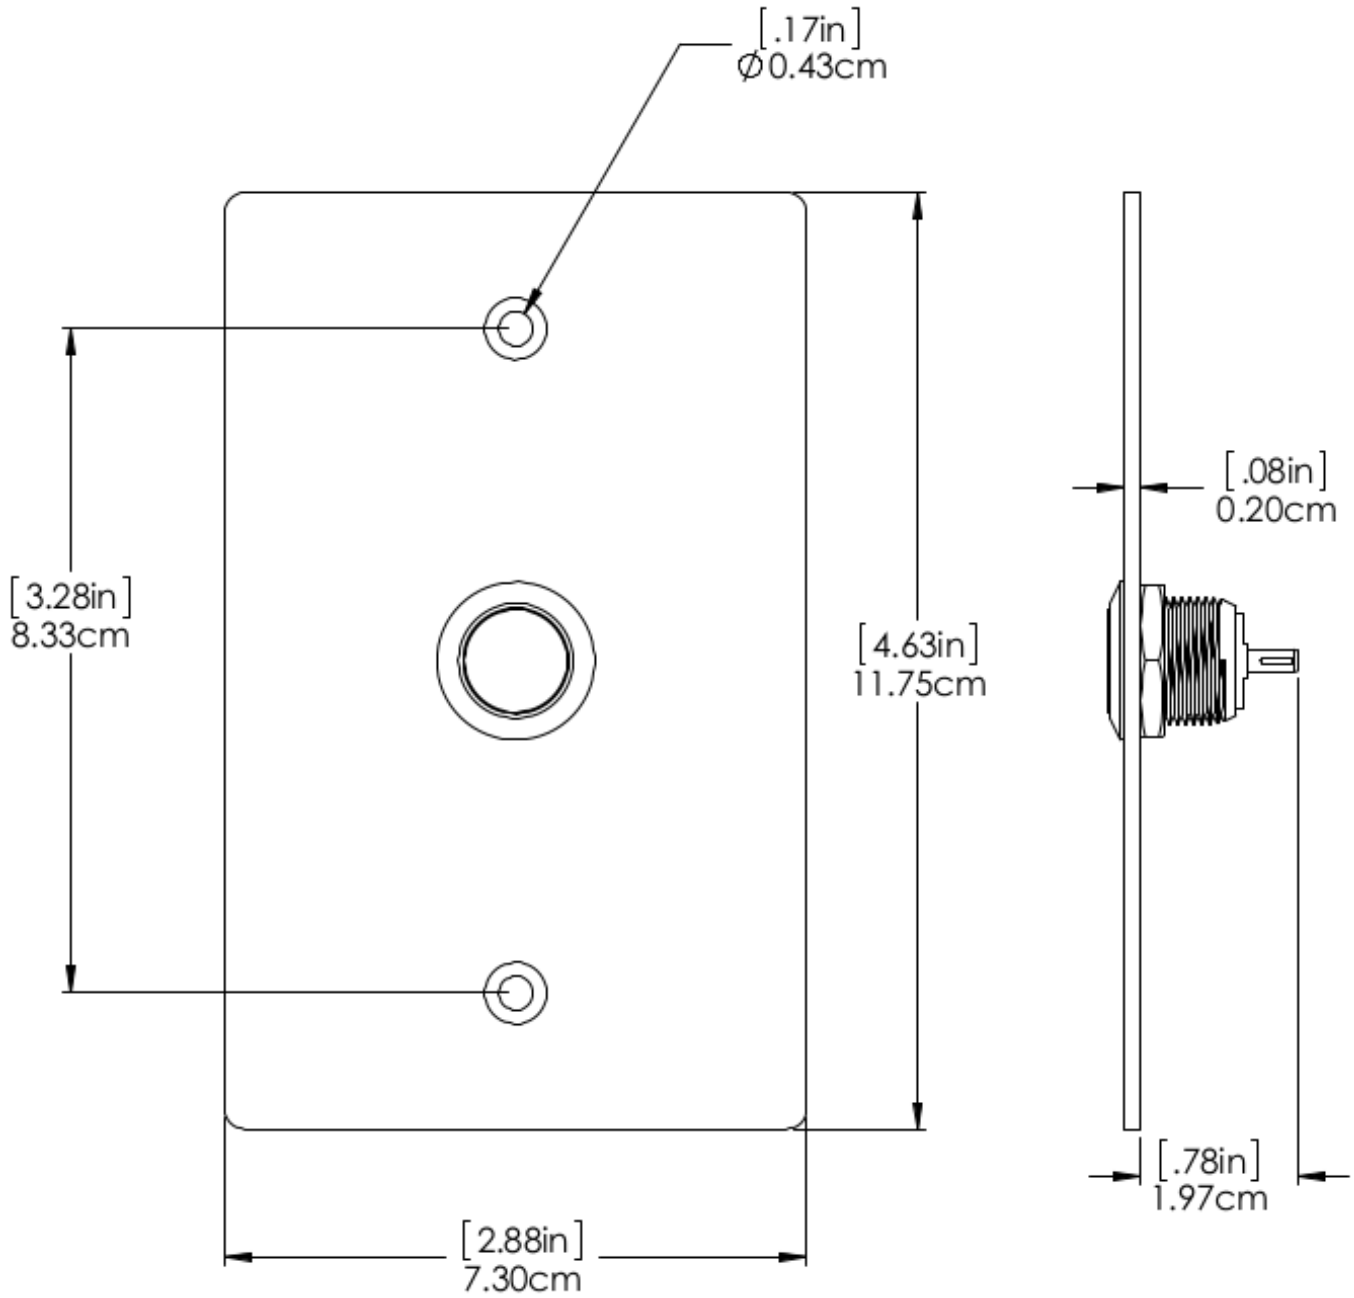

WL-SPKR-RB-W

Job Name: Model Numbers: Date:

Location: Notes: