

Carina Event Manager Lite



Description

The Wahsega Carina Event Manager Lite is a next-generation mass notification and IoT platform for many different types of buildings. Featuring an easy-to-use calendar scheduler, it incorporates live paging and announcements with audio, text and flashers in addition to sensors and relays for monitoring a variety of building systems. A member of Wahsega's Carina family of products, the Event Manager Lite performs auto-discovery on Carina endpoints at startup and enables users to configure those endpoints individually or in bulk.

Used in conjunction with a SIP server such as Wahsega's PICS, standard IP phones can initiate live audio announcements from the Carina Event Manager Lite to paging zones throughout the building. For bells and announcements including audio and text, pre-recorded audio files stored in the Event Manager Lite can be sent to endpoints via a preconfigured calendar event, a SIP call or the click of a webpage button. In addition, IoT sensors can be connected to the Carina Sensor Interface Appliance to send out announcements when conditions trigger a relay closure.

With auto-discovery, bulk configuration and quick webpage setup, the Carina Event Manager Lite makes it easy to deploy a reliable building-wide announcement and monitoring system.

Features

- Calendar scheduler
- Audio, text and flasher announcements
- Auto-discovery of Wahsega Carina devices for configuration
- Fully configurable via simple dashboard
- Easy installation
- 45-day power fail memory
- Remote firmware upgradeable
- Bulk firmware upgrades for Carina system devices
- Supports 32 endpoints
- Industry low power usage
- Global, bulk and individual device configuration options
- Monitor multiple building IoT sensors
- Network device health reporting
- 10/100 Ethernet port with Power-over-Ethernet (802.3af PoE)
- +9-16V DC input (if not using PoE)
- Standard 1u rack mounting



Job Name: **Model Numbers:** **Date:**

Location: **Notes:**

Specifications

- Ethernet: 10/100 Mbps
- Protocol: SIP RFC 3261 compatible
- Power Input: PoE 802.3af or +9-16V DC
- Current Draw: <2W
- Max Cable Length: 100m (per standard)
- Temperature Range: -40C to +60C
- Construction: Aluminum extrusion with aluminum faceplates
- Dimensions: 1.66" H x 4.75" W x 5.30" D
- Weight: 15.1 ounces
- Warranty: 2 years limited

Model Number

Wahsega Labs	Event Manager	Carina	Lite
WL	EM	CAR	LITE

WL = Wahsega Labs

EM = Event Manager

CAR = Carina

LITE = Lite

WL-EM-CAR-LITE

Wahsega Labs

Event Manager

Carina

Lite


Job Name: Model Numbers: Date:

Location: Notes:


Front View



Side View

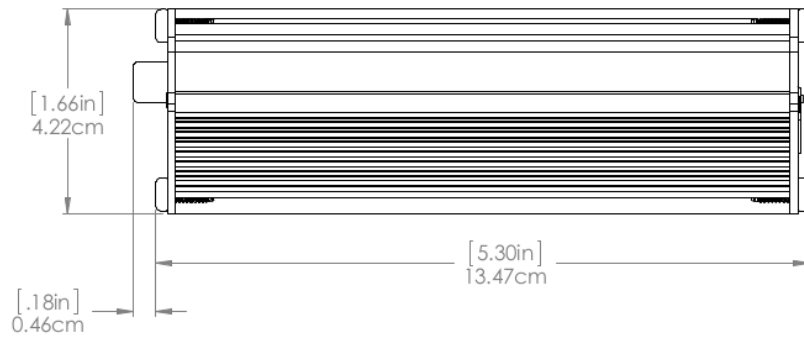

Rear View

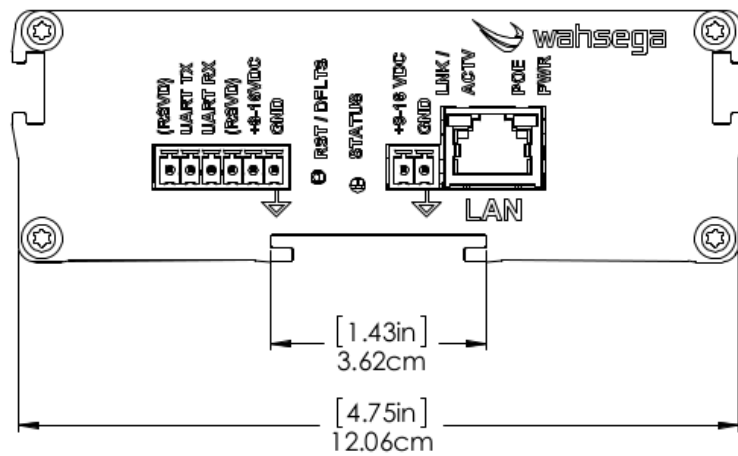

Job Name: Model Numbers: Date:

Location: Notes: