

## Sound Reinforcement Input Panel



### Description

The Wahsega Sound Reinforcement Input Panel is a single-gang, wall-mount control which operates in conjunction with Wahsega's IP Speakers.

Designed for wall mounting in a single-gang electrical enclosure, the Sound Reinforcement Input Panel connects to any Primary or Second Room (where available) Wahsega Ceiling Speaker, Surface-Mount Wall Speaker or IP Display to provide the speaker with a local audio input for reinforcement functionality with simple audio control.

Using the integrated 3.5mm stereo input, users can connect a microphone, laptop, smartphone or any other audio-producing device and immediately play audio over the connected Wahsega speaker. Simple push-on, push-off power and smooth rotary volume control are easy to use and understand. An LED indicator light lets users know when the panel is on and actively transmitting audio to the speaker. Simple installation requires only an RJ45 plug and Cat5e cable to the speaker.

Easy to install and simple to use, the Sound Reinforcement Input Panel is the perfect addition to any Wahsega classroom speaker system.

### Features

- Integrated audio input jack
- Simple wall-mount installation
- Volume control knob with on/off activate button
- Status LED
- Standard single-gang wallplate size
- RJ45 connection for quick installation
- Commercial-grade steel construction



**Job Name:**  **Model Numbers:**  **Date:**


**Location:**  **Notes:**

## Specifications

- Audio Input: Standard 3.5mm (1/8") stereo jack, consumer line level input
- Max Cable Length to speaker: 20m
- Temperature Range: -20°C to +70°C
- Dimensions: 4.63" x 2.88" x 1.25"
- Construction: 24-gauge steel plate with white polyester powder coat paint
- Warranty: 2 years limited

## Model Number

### WL-SPKR-RSR-W

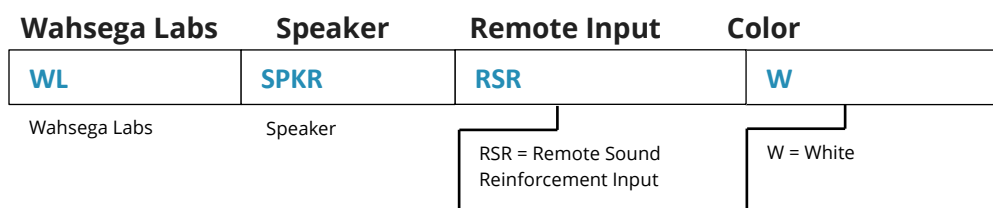

## Connections

Connects to the Wahsega Ceiling Speaker, Wahsega Surface Mount Wall Speaker, Wahsega IP Display or Second-Room (-2R) Wahsega speaker via a standard RJ45 jack on rear of plate. Power supplied from the Wahsega speaker. Maximum distance from speaker is 20 meters.

## Installation

Standard single-gang electrical box, not provided.

## Speaker Compatibility

WL-SPKR-SMT-CAR  
WL-SPKR-SMT-INF  
WL-SPKR-SMT-2R  
WL-SPKR-22-CAR  
WL-SPKR-22-INF  
WL-SPKR-22-2R



WL-IPD-SPKR-510-CAR  
WL-IPD-SPKR-510-INF  
WL-IPD-SPKR-520-CAR  
WL-IPD-SPKR-520-INF  
WL-IPD-SPKR-540-CAR  
WL-IPD-SPKR-540-INF

WL-IPD-SPKR-510D-CAR  
WL-IPD-SPKR-510D-INF  
WL-IPD-SPKR-510D-CAR-TM  
WL-IPD-SPKR-510D-INF-TM  
WL-IPD-SPKR-510D-SIP-TM

Job Name:  Model Numbers:  Date:

Location:  Notes:

# Dimensions

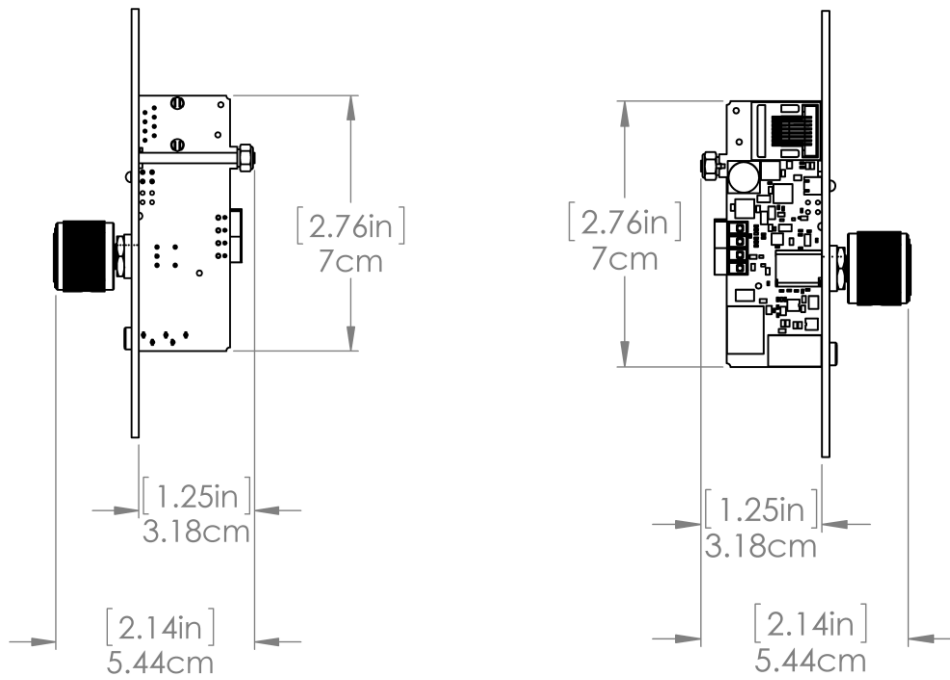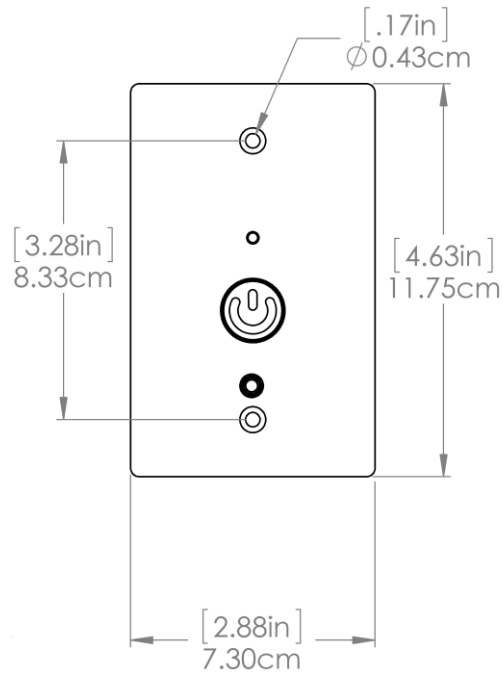

Job Name:  Model Numbers:  Date:

Location:  Notes: